


# SS 2400 SHIELD REMOVAL




## STEP 1.

FIRST, REMOVE THE CHIN BAR FROM THE SS2400 HELMET. PULL THE CHIN RELEASE SWITCH ON THE BOTTOM AND PULL DOWNWARDS UNTIL THE CHIN BAR CLICKS FREE, THEN PULL THE CHIN BAR AWAY FROM THE HELMET.

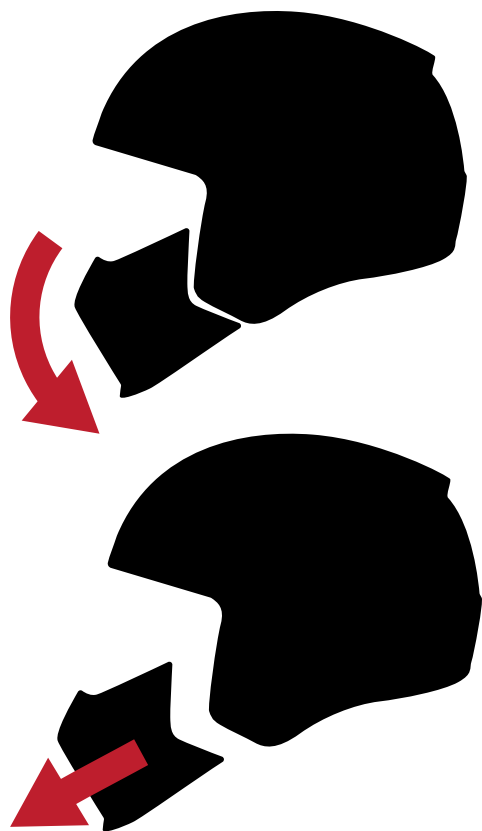

## STEP 2.


PULL THE VISOR DOWN JUST SLIGHTLY BELOW THE TOP OF THE HELMET, THEN GENTLY PULL EACH SIDE OF THE VISOR FREE FROM THE LOCKING MECHANISM.

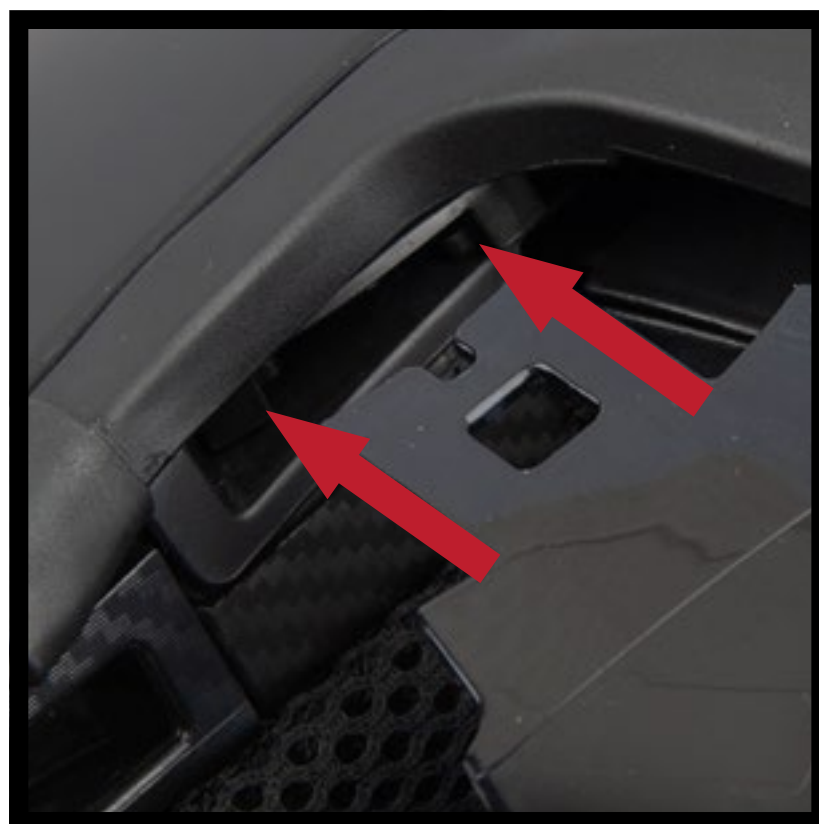

## STEP 3.

ENSURE THE LOCKING MECHANISM IS IN THE DOWN POSITION. LINE UP THE EDGE OF THE NEW VISOR TO THE LOCKING MECHANISM, AND PRESS FIRMLY INTO PLACE. REPEAT ON THE OPPOSITE SIDE, AND ENSURE A SECURE FIT AND THAT THE VISOR CAN PROPERLY OPEN AND CLOSE.

# SS 2400 SHIELD REMOVAL

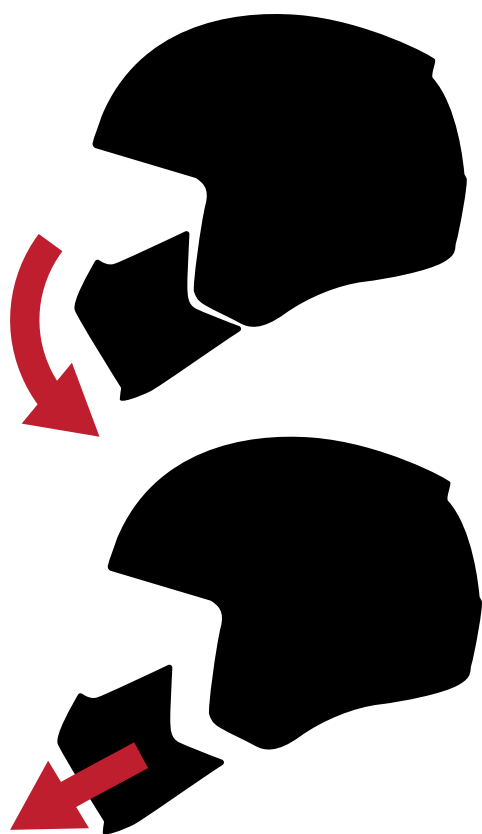


## ÉTAPE 1.

RETIREZ LA BARRE DE MENTON DU CASQUE SS2400. POUR RETIRER LA BARRE DE MENTON, APPUYEZ SUR LE BOUTON DE DÉVERROUILLAGE AU BAS DU MENTON ET TIREZ VERS LE BAS JUSQU'À CE QUE LA BARRE SE LIBÈRE, PUIS RETIREZ LA BARRE DU CASQUE.



## ÉTAPE 2.

TIRER LÉGÈREMENT LA VISIÈRE EN DESSOUS DU HAUT DU CASQUE, PUIS TIRER DOUCEMENT DE CHAQUE CÔTÉ DE LA VISIÈRE DU MÉCANISME DE VERROUILLAGE.

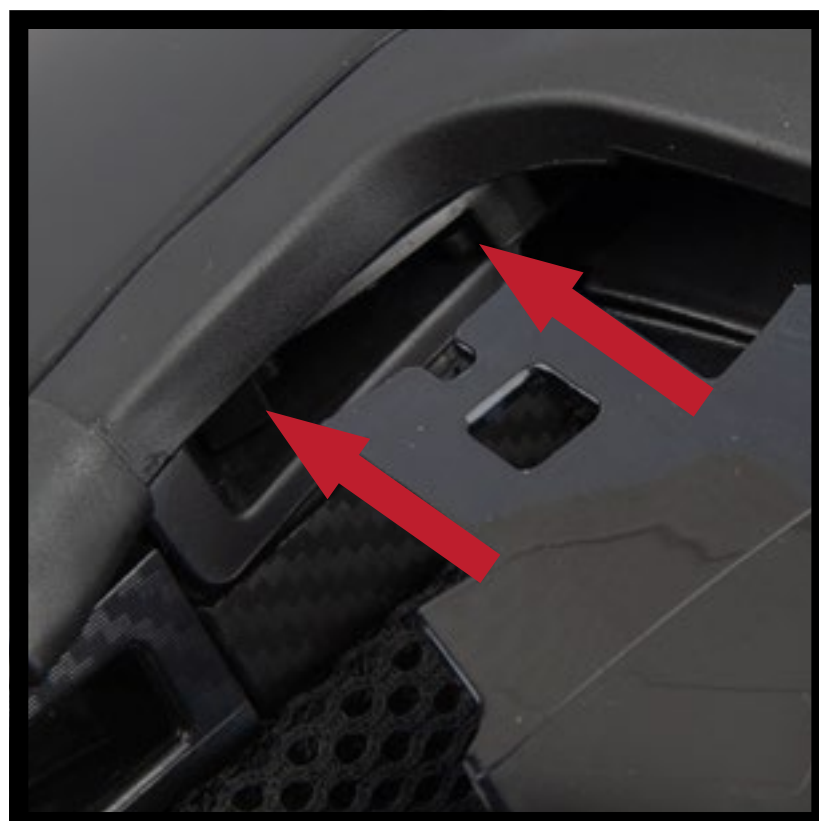

## ÉTAPE 3.

ASSURER LE MÉCANISME DE BLOCAGE EST EN POSITION VERS LE BAS. ALIGNEZ LE BORD DU NOUVEAU VISOIR AU MACHANISME DE VERROUILLAGE, ET APPUYEZ FERMEMENT EN PLACE. RÉPÉTER SUR LE CÔTÉ OPPOSÉ, ET ASSURER UN AJUSTEMENT SÛR ET QUE LA VISIÈRE PEUT S'OUVRIR ET SE FERMER CORRECTEMENT.